


## Chrysler 22 Pin Connector Pinout:

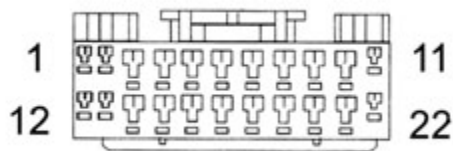

*Viewed from mating end of connector*

1	Constant 12 Volts (Battery)
2	Ignition Trigger Wire
3	Light Connection (Not Used In Our Situation)
4	
5	
6	
7	Right Front Speaker (+)
8	Right Front Speaker (-)
9	Left Front Speaker (-)
10	Left Front Speaker (+)
11	Ground
12	Constant 12 Volts (Battery)
13	Amplifier Enable Signal (Not Used In Our Situation)
14	PCI Bus (Not Used In Our Situation)
15	Radio Mute (Not Used In Our Situation)
16	
17	
18	Left Rear Speaker (+)
19	Left Rear Speaker (-)
20	Right Rear Speaker (-)
21	Right Rear Speaker (+)
22	Ground

A radio with this type of connection is grounded by pins 11 and 22.